


ПЛОСКИЙ ТОЛКАТЕЛЬ (ИСПОЛНЕНИЕ 1)

Material: WS 1.2210
Standard: DIN1530-FH/ISO8693
Hardness: HRC58-62

Flat ejector pins

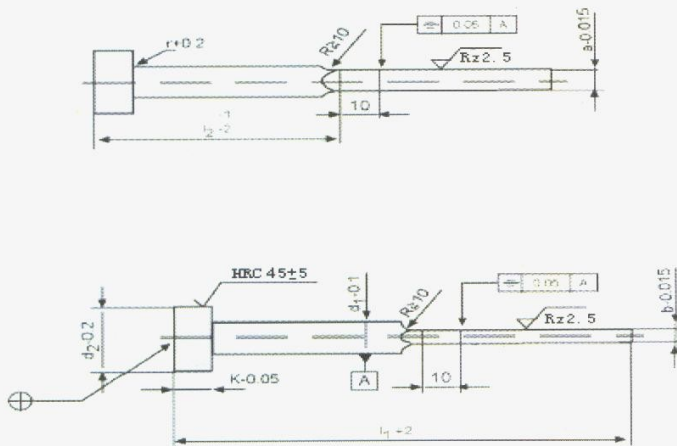


代碼 Code	a ⁰ -0.015	b ⁰ -0.015	d1 ⁰ -0.1	d2 ⁰ -0.2	k ⁰ -0.05	r	L1/L2									
							60/30	80/40	100/50	125/60	160/80	200/100	250/125	315/160		
BZZD	3.8	0.8	4.2	8	3	0	*	*	*	*						
		1					*	*	*							
		1.2					*	*	*	*						
	4.5	1	5	10	5	1	*	*	*	*	*					
		1.2					*	*	*	*	*					
		1.5					*	*	*	*	*	*				
	5.5	1	6	12	5	1	*	*	*	*	*	*				
		1.2					*	*	*	*	*	*	*			
		1.5					*	*	*	*	*	*	*	*		
	7.5	2	8	14	7	1	*	*	*	*	*	*	*			
		1.2					*	*	*	*	*	*	*	*		
		1.5					*	*	*	*	*	*	*	*	*	
9.5	2	10	16	7	1	*	*	*	*	*	*	*	*			
	1.5					*	*	*	*	*	*	*	*	*		
	2					*	*	*	*	*	*	*	*	*	*	
11.5	2	12	20	7	1	*	*	*	*	*	*	*	*	*		
	2.5					*	*	*	*	*	*	*	*	*	*	
	2					*	*	*	*	*	*	*	*	*	*	
15.5	2	16	22	7	1	*	*	*	*	*	*	*	*	*		
	2.5					*	*	*	*	*	*	*	*	*	*	

Example: Order Catalog No b×a×d1×L—Q`ty(pcs)
BZZD 1×3.8×4.2×100—10(pcs)

ПЛОСКИЙ ТОЛКАТЕЛЬ (ИСПОЛНЕНИЕ 2)

Material: WAS 1.2344
Standard: DIN1530-F/ISO8693
Hardness: surface: $\geq HV_{0.05} 950$
core: HRC40-45

Flat ejector pins

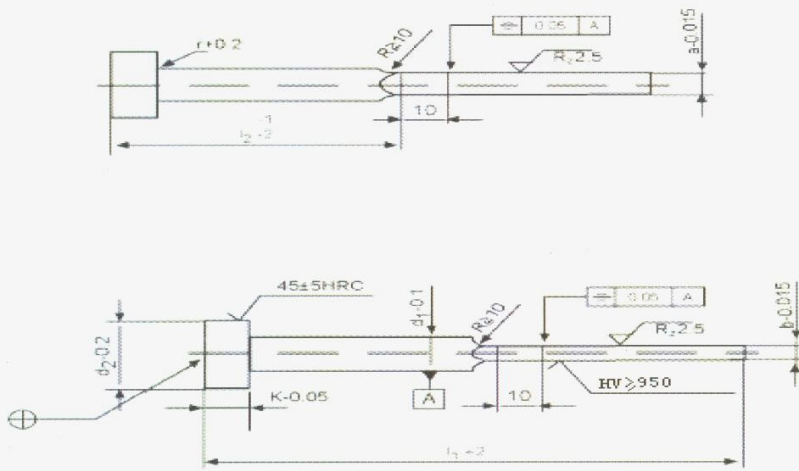


代码 Code	a ⁰ -0.015	b ⁰ -0.015	d1 ⁰ -0.1	d2 ⁰ -0.2	l ⁰ -0.05	r	L1/L2								
							60/30	80/40	100/50	125/60	160/80	200/100	250/125	315/160	
BZSD	3.8	0.8	4.2	8	3	0			*	*	*				
		1							*	*	*				
		1.2							*	*	*	*			
	4.5	1	5	10	5	1			*	*	*	*			
		1.2							*	*	*	*			
		1.5							*	*	*	*	*		
	5.5	1	6	12	5	1			*	*	*	*			
		1.2							*	*	*	*	*		
		1.5							*	*	*	*	*	*	
	7.5	2	8	14	7	1			*	*	*	*	*	*	
		1.2							*	*	*	*	*	*	
		1.5							*	*	*	*	*	*	
9.5	2	10	16	7	1			*	*	*	*	*	*		
	1.5							*	*	*	*	*	*		
	2							*	*	*	*	*	*		
11.5	2	12	20	7	1			*	*	*	*	*	*		
	2.5							*	*	*	*	*	*		
	2							*	*	*	*	*	*		
15.5	2	16	22	7	1			*	*	*	*	*	*		
	2.5							*	*	*	*	*	*		
	2.5							*	*	*	*	*	*		

Example: Order Catalog NO a×b×d×L—Q¹ ty(pcs)
BZSD 1×3.8×4.2×100—10(pcs)

ПЛОСКИЙ ТОЛКАТЕЛЬ (ИСПОЛНЕНИЕ 3)

Black MoS₂ Flat ejector pins

Material: WAS 1.2344
Standard: DIN 1530F-F/ISO 8693
Hardness: surface: Black Bath Nitrided to $\geq HV_{0.3} 950$ with MoS₂ coating
core: HRC 40-45

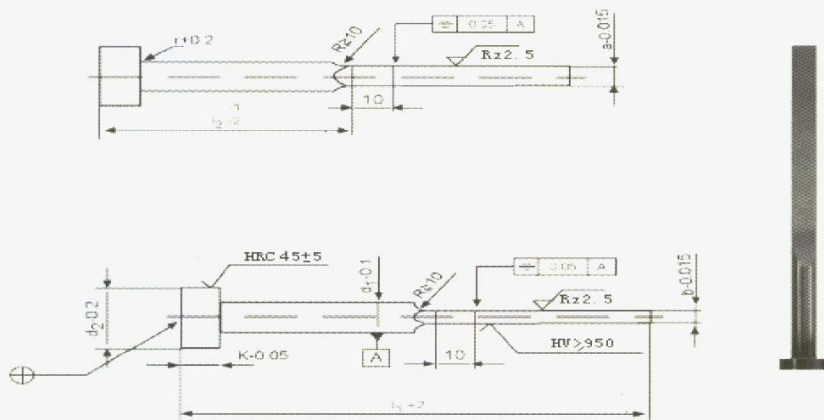

代码 Code	a ⁰ -0.015	b ⁰ -0.015	d1 ⁰ -0.1	d2 ⁰ -0.2	k ⁰ -0.05	r	L1/L2								
							60/30	80/40	100/50	125/60	160/80	200/100	250/125	315/160	
BZSDB	3.8	0.8	4.2	8	3	0			*	*	*				
		1							*	*	*				
		1.2							*	*	*				
	4.5	1	5	10					*	*	*	*			
		1.2							*	*	*	*			
		1.5							*	*	*	*			
	5.5	1	6	12	5	1			*	*	*	*			
		1.2							*	*	*	*			
		1.5							*	*	*	*			
	7.5	2	8	14					*	*	*	*	*		
		1.2							*	*	*	*	*	*	
		1.5							*	*	*	*	*	*	
9.5	2	10	16			*	*	*	*	*	*				
	1.5					*	*	*	*	*	*				
	2					*	*	*	*	*	*				
11.5	2	12	20	7	1			*	*	*	*	*	*		
	2.5							*	*	*	*	*	*		
	2							*	*	*	*	*	*		
15.5	2	16	22					*	*	*	*	*	*	*	
	2.5							*	*	*	*	*	*		
	2							*	*	*	*	*	*		


Example: Order Catalog No b×a×d1×L1—Q¹ty(pcs)
BZSDB 1×3.8×4.2×100—10(pcs)

ПЛОСКИЙ ТОЛКАТЕЛЬ (ИСПОЛНЕНИЕ 4)

Standard: JIS

Flat Ejector Pins

Material	Hardness
SKD-61	Surface: HV _{0.3} ≥ 950 Core : HRC40-45
SUJ-2	HRC58-62

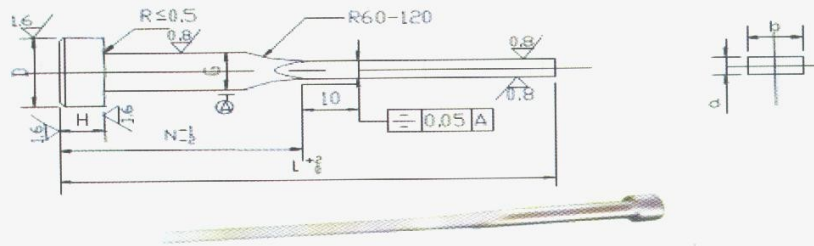

代碼 Code	b ⁰ _{-0.015}	a ⁰ _{-0.015}	G ⁰ _{-0.1}	D ⁰ _{-0.2}	H ⁰ _{-0.05}	L/N				
						100/40	150/50	300/75	250/100	300/125
BZSC (BZZC)	3	0.8	3.5	7	4	*	*	*	*	*
		1				*	*	*	*	*
		1.2				*	*	*	*	*
		1.5	*			*	*	*	*	
		0.8	4			*	*	*	*	*
		1				*	*	*	*	*
	1.2	*		*	*	*	*			
	4	1.5	5	9	*	*	*	*	*	
		0.8			*	*	*	*	*	
		1			*	*	*	*	*	
		1.2	*		*	*	*	*		
		1.5	*		*	*	*	*		
		1.8	*		*	*	*	*		
	5	0.8	6	10	5	*	*	*	*	*
		1				*	*	*	*	*
		1.2				*	*	*	*	*
		1.5	*			*	*	*	*	
		1.8	*			*	*	*	*	
		2	*			*	*	*	*	
	6	0.8	7	11	6	*	*	*	*	*
		1				*	*	*	*	*
		1.2				*	*	*	*	*
		1.5	*			*	*	*	*	
		1.8	*			*	*	*	*	
		2	*			*	*	*	*	
	6	0.8	8	13	8	*	*	*	*	*
		1				*	*	*	*	*
		1.2				*	*	*	*	*
		1.5	*			*	*	*	*	
		1.8	*			*	*	*	*	
		2	*			*	*	*	*	
	8	1	10	15	10	*	*	*	*	*
		1.2				*	*	*	*	*
		1.5				*	*	*	*	*
		1.8	*			*	*	*	*	
		2	*			*	*	*	*	
		1	12			17	*	*	*	*
	1.2	*		*	*		*	*		
	1.5	*		*	*		*	*		
	1.8	*	*	*	*		*			
	2	*	*	*	*		*			

Example: Order Catalog No a×b×G×L—Q` ty(pcs)
SKD61: BZSC 1×3×3.5×100—10(pcs)
SUJ2: BZZC 1×3×3.5×100—10(pcs)